

TransTech IV

2 in 1 Automatic Transmission Fluid Exchange System

The TransTech IV combines both Inline and Dipstick capabilities allowing for the two most common methods of ATF exchange from a single machine. With both Inline and Dipstick services together in one cabinet, TransTech IV occupies reduced floor space with minimal investment while providing service to a wider variety of vehicles.

- Automatic Inline Exchange Connect to a transmission cooler line and press one button. Walk away until the service is complete.
- **Dipstick Exchange** A convenient dipstick tube exchange requiring no tools or adapters.
- **Drain Pan Feature** Allows operator to drain transmission pan for a convenient and mess-free filter change.
- Transmission Cooler Flush Feature Allows operator to flush transmission cooler and cooler lines.
- Patented Level Synchronization Ensures the transmission cannot be under or overfilled.
- Automatic Bypass Ensures that transmission will not run out of fluid during the exchange process.
- 26 Quart (24.6 L) New Fluid Reservoir Allows user to service large capacity transmissions.
- **High Volume Pump** For rapid and efficient service.
- Compact Cabinet Designed for ease of storage.
- Complete Adapter Kit For servicing most domestic and foreign vehicles.

Inline Exchange - This conventional ATF exchange method provides an effective transmission flush by connecting directly to the transmission cooler lines. New fluid flows through the transmission as old fluid is directed into the TransTech IV waste tank in a 1 to 1 ratio. Vehicle-specific adapters are included for a perfect fit meaning less mess and zero waste.


Dipstick Exchange - TransTech IV features a convenient Dipstick option that allows an effective ATF exchange through the transmission dipstick tube. This useful alternative is suitable when cooler lines are corroded or difficult to access.



Part No. 500-1125



MotorVac TransTech IV

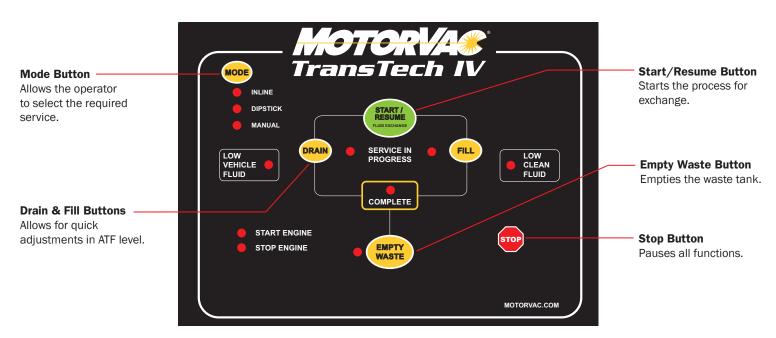

The user interface has been designed to allow any operator to feel comfortable using the machine for the first time.

TransTech IV Adapter Kit *

The following adapters are included with the TransTech IV 500-1125. The most common applications are listed below; other applications may apply.

PART NO.	QTY	DESCRIPTION			
060-1000	1	1/4" Male Bump Tube - Most Asian Vehicles			
060-1100	1	5/16" Male Bump Tube - Most Asian Vehicles			
060-1200	1	3/8" Male Bump Tube - Most Asian Vehicles			
060-1300	1	1/4" Open End Hose - Most Asian Vehicles			
060-1400	1	5/16" Open End Hose - Most Asian Vehicles			
060-1500	1	3/8" Open End Hose - Most Asian Vehicles			
060-0450	2	Hose Clamp 7/8" I.D. Max - General Application			
060-1700	1	5/16" Flare, 7/16" - 24 - Domestic Vehicles			
060-1800	1	3/8" Flare , 5/8" - 20 - Domestic Vehicles			
060-3800	1	#5 SAE Flare - European Vehicles			
062-0100	1	5/16" Male Flare-Deep Ford Vehicles			
062-2060	1	5/16" Female Flare-Deep Ford Vehicles			
062-0120	1	3/8" Male Flare-Deep - Ford Vehicles			
062-1034	1	3/8" Female Flare-Deep - Ford Vehicles			
080-0594	1	MQD x 3/8" FPT - General Application			
080-0595	1	MQD x 3/8" MPT - General Application			

*	Sub	ject	to	chang	e	with	out	notice	

PART NO.	QTY	DESCRIPTION
061-0605	1	#5 SAE x #6 SAE Union - European Vehicles
062-0170	1	5/16" Female Flare x 1/4" MPT - General Application
062-0180	1	3/8" Female Flare x 1/4"MPT - General Application
060-4200	1	5/16" Male Tube with Locking Quick Connect Dodge / Ford Vehicles
060-4300	1	3/8" Male Tube with Locking Quick Connect Dodge / Ford Vehicles
062-4401	1	Ford 3/8" - Double Bump
061-1550	1	1/2" Open End Hose Chrysler V-10 Diesel
062-2040	1	1/2" Male Tube with Locking Quick Connect Chrysler V-10 Diesel
062-2066	1	3/8" Male Tube with Locking Quick Connect G.M. 95 & up Vehicles
060-2402	2	14 mm x 1.5 Banjo Euro / Asian Vehicles
060-2740	1	14 mm x 1.5 Banjo Bolt Euro / Asian Vehicles
060-2741	3	14 mm Washer Euro / Asian Vehicles
060-2742	1	14mm x 1.5 Cap Nut Euro / Asian Vehicles
080-0592	1	MQD x 1/4" FPT General Application
060-2600	1	16mm x 1.5 Bubble Flare European Vehicles

Specifications

Power Cord: 10' (3 m) 12 gauge Power Supply: 12 volt DC New Fluid Capacity: 26 Quart (24.6L) Shipping Height: 41" (104 cm) Shipping Width: 24" (61 cm) Shipping Depth: 19" (48 cm) Shipping Weight: 90lbs (40.8 kg)

