

Heavy Duty 4 Post Lifts

Easily converts to a Drive-Thru Lift!



Model shown: SM18N000BL
9,000 lbs. Capacity Rolling Jack
Model shown: RJ9001BK

- Adjustable lock bar ensures runways are level at any lock position
- Includes air-operated remote release locking latches and inline filter/regulator
- Hydraulic cylinder located under runway with no obstructions

18,000 - 30,000 lb. Drive-On Four Post Lifts

Heavy Duty Drive-On Four Post Lifts*	SM18N000BL SM18N000RD	SM18N001BL SM18N001RD	SM30N010BL SM30N010RD	SM30N011BL SM30N011RD	SM30N012BL SM30N012RD
Capacity	18,000 lbs.		30,000 lbs.		
Rise	68"				
Overall Length	22'-11-3/16"	25'-11-3/16"	19'-9"	22'-9"	25'-7"
Overall Width	11'-5-3/4"		12'-4-13/16"		
Drive-thru Width	10' - 1/8"		11'		
Max/Min Wheelbase	194"	230"	235"	271"	307"
Motor/Voltage	2 HP, 208-230v, 1Ø		4 HP, 208-230v, 1Ø		
Min Bay Size	16'x27'	16'x30'	16'x30'	16'x33'	16'x36'

*BL = Blue and RD = Red

2 Post Lift Accessories

The accessories listed below are commonly used with two-post lifts to increase productivity in the bay. See your retailer for more information.

Lifts & Accessories	Extended Height GM Adapters	Extended Height Truck Adapters	1/2" Pad Adapter	1" Pad Adapter	2-1/2" Pad Adapter	Stackable Extensions	Air/Electric Utility Box	Tool Holder	Door Defender
SPOA10	FJ6133BK	FJ6115BK	FJ6138BK	FJ6190YL	FJ6139BK		FA5911BK	FA5191*	N823
SPO10	FJ6133BK	FJ6115BK	FJ6138BK	FJ6190YL	FJ6139BK		FA5911BK	FA5191*	N823
SPOA10-RA						FJ7880BK	FA5911BK	FA5191*	N823
SPOA10-TA						Included	FA5911BK	FA5191*	N823
SPO10-TA						Included	FA5911BK	FA5191*	N823
SPO10-RA						FJ7880BK	FA5911BK	FA5191*	N823
SPO12						Included	FA5911BK	FA5191*	N823
SPO15/SPO15-LC						Included	FA5911BK	FA5191	N823
SPO18/SPO18-LC						Included	FA5911BK	FA5191	N823

Drive-On Lift Accessories

*Available in red (RD) or blue (BL). Order part number with color suffix.

The accessories listed below are commonly used with four-post lifts to increase productivity in the bay. See your retailer for more information.

Lifts & Accessories	6,000 lb. Rolling Jack	7,000 lb. Rolling Jack	9,000 lb. Rolling Jack	15,000 lb. Rolling Jack	Drive-thru Ramps	Oil Drain Pans	Bolt-on Alignment	Air/Electric Utility Box	Internal Airlines
SM14/SMO14		RJ7000ZY			S100075*	FC5967BK	S100074*	FA915 Kit	FC5760-14
AR14/ARO14		(2) Included			S100075*	FC5967BK		FA915 Kit	Included
SM18			RJ9001BK		FC5825*	FC5967BK	FA5413*	FA915 Kit	FC5760
SM30			RJ9000-2BK	FC5710-75BK	FC5780-3*	FC5968BK	FC5396*	FA2259BK	Included
Y12	RJ6000Y				Z100008*	FC5967BK			FC5760-14
YA12	(2) Included				Z100008*	FC5967BK			Included



www.rotarylift.com

Rotary World Headquarters
2700 Lanier Drive
Madison, IN 47250, USA

Contact Information

Sales: p 800.640.5438
f 800.578.5438
e userlink@rotarylift.com
Tech. Support: p 800.445.5438
f 800.822.6502
e userlink@rotarylift.com

FIND US ON



Lit# Rotary_LD_HD_2P4P_2012.10 (SUPERCEDES Lit# Rotary_LD_HD_2P4P_2012.04)
©2012 VEHICLE SERVICE GROUP™. Printed in U.S.A., All Rights Reserved. Unless otherwise indicated, ROTARY LIFT, VEHICLE SERVICE GROUP™, DOVER and all other trademarks are property of Dover Corporation and its affiliates.



The World's Most Trusted Lift...

Since 1925, Rotary Lift has built quality in to everything we do. As the oldest U.S. lift manufacturer, our lifts are built and cycle tested for years of trouble-free service. Rotary lifts are backed by full warranty and are supported by the industry's best nationwide network of installers and service providers. *Quality and value...that's Rotary.*



The World's Fastest Lift Is Two Times Faster Than Any Other 2 Post Lift!

Shockwave's patent pending DC control system uses 2 standard group 24 batteries to give you the speed you need to increase your service orders per bay. And it's 110v battery charger means there's no need for expensive 220v wiring.

WATCH THE SPEED OF SHOCKWAVE!




rotarylift.com/shockwave

25 second rise time!
19 second descent!
Speeds based on weight of vehicle



Model shown: SPOA10U5G5RD

Asymmetrical Design
Perfect for cars and light trucks
Allows doors to easily open without dings!

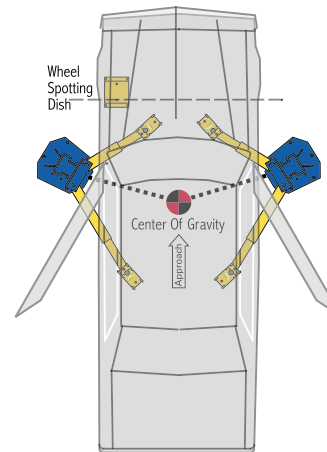

Vehicle Center of Gravity

Arm Adapters Packages

Three-Stage Flip-Up Adapters with built-in height adapters on standard arms



Model shown: SPOA10N700BL with standard arms and three-stage flip-up adapters

RA - 3 stage arms give more reach - perfect for low profile vehicles

Model shown: SPOA10N5G0BL with three-stage front arms and round rubber adapters

7,000 - 10,000 lb. SHOCKWAVE Two Post Lifts

Two-Post Lifts* *BL = Blue / RD = Red	SPOA10U705BL SPOA10U705RD Standard Arms Flip Up Adapters	SPOA10U5T5BL SPOA10U5T5RD Three-Stage Arms Truck Adapters	SPOA10U5G5BL SPOA10U5G5RD Three-Stage Arms Round Adapters	SPOA7U7N5BL SPOA7U7N5RD Fixed Front Pads with 3-Stage Rear Arms	SPOA7N6X0BL SPOA7N6X0RD Drive-Over Moveable Pads
Capacity	10,000 lbs.	10,000 lbs.	10,000 lbs.	7,000 lbs.	7,000 lbs.
Rise	81-1/4"	78-7/8"	76-7/8"	76-7/8"	77"
Overall Height	11' - 8-1/2"		11' - 8-1/2"	11' - 8-1/2"	11' - 8'
Overall Width	11' - 5-1/2"		11' - 5-1/2"	11' - 7-7/8"	10' - 11-3/8"
Drive-thru	95-1/4"		95-1/4"	83-3/8"	89"
Front Arm Min/Max	20-1/2" - 40-3/4"	21-5/8" - 43-1/2"	21-5/8" - 43-1/2"	N/A	N/A
Rear Arm Min/Max	40-1/4" - 61"	34-1/2" - 58"	34-1/2" - 58"	64-1/2" - 30-3/8"	N/A
Min Adapter Height	4-3/4"		3-5/8"	Rear arm: 3-3/4" Front pad: 2-7/8" Front arm: 5-1/4"	3"
Min Bay Size	12'x24'		12'x24'	12'x24'	12'x24'
Motor / Voltage 1Ø	5 HP / 110 v		5 HP / 110 v	5 HP / 110 v	5 HP / 110 v
Time of Full Rise	25 seconds		25 seconds	25 seconds	25 seconds
Time of Descent	19 seconds		19 seconds	19 seconds	19 seconds

10,000 lb. Asymmetric Two Post Lifts

Two-Post Lifts* • 3-stage arms 13 Locking Positions	SPOA10N700BL SPOA10N700RD Standard Arms Flip Up Adapters	SPOA10N5T0BL SPOA10N5T0RD Three-Stage Arms Truck Adapters (TA)	• SPOA10N5G0BL • SPOA10N5G0RD Three-Stage Arms Round Adapters (RA)
*BL = Blue / RD = Red			
Rise	78-1/4"	78-1/4"	73-7/8"
Overall Height	11' - 8-1/2"		
Overall Width	11' - 5-1/2"		
Drive-thru	95 - 1/4"		
Front Arm Min/Max	20-1/2" - 40-3/4"	21-5/8" - 43-1/2"	21-5/8" - 43-1/2"
Rear Arm Min/Max	40-1/4" - 61"	34-1/2" - 58"	34-1/2" - 58"
Min Adapter Height	4-3/4"	4-3/4"	3-5/8"
Motor/Voltage	2 HP, 208-230V		
Min Bay Size	12'x24'		

See the back page for adapters & accessories

10,000-18,000 lb. 2 Post Symmetric Lifts

Symmetrical Features:

- "Double S" column design maximizes the strength of the column and surface contact area of the bearings
- Single point lock release disengages the locks at the same time
- Full stroke cylinders in each column
- Arm restraints on each arm engage when the vehicle is lifted
- 3-position spotting dish
- Shockwave equipped 10,000 and 12,000 lb capacity lifts available




Model shown: SPO10N700BL

10,000 lbs. Capacity
Available with Shockwave

Symmetrical Design

Wider drive-thru
- perfect for trucks and vans

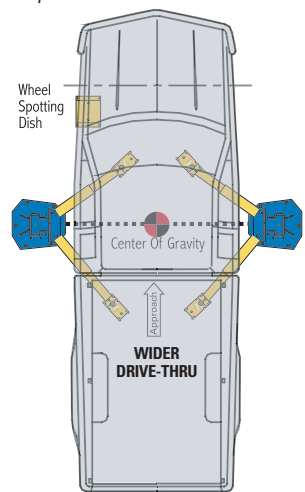

Vehicle Center of Gravity

Truck Adapters Included

Arm Adapters Packages

10,000 lb. capacity lift:
Three-Stage Flip-Up Adapters with built-in height adapters on standard arms



12 to 18,000 lb. capacity lift:
Thread Up Stackable Inserts designed for heavier vehicles, (additional stack adapters available)

TA and RA Adapters also available for 10,000 lb. capacity lift - TA adapters come with stacks



Model shown: SPO15N310BL

15,000 lbs. Capacity

3 Stage Arms
for Added Reach!
Low Ceiling
Available!

Narrow Bay
and Low Ceiling
Model Available!



Model shown: SPO12N7T0BL

12,000 lbs. Capacity
Available with Shockwave
Lifts shown with optional accessories

General Service Drive-On Lifts

Y12 - Wide Wheelbase Range - Flat Top Surface
Flush Mounted or Recessed



Model shown: Y12N0000BL

12,000 lb. Capacity

- 33% faster speed of rise
- Hydraulic cylinder, locking mechanism and position sensor *are protected inside and under the runways*

True Up / Down Movement
20% More Work Area
and Better Lift Access!



20" Wide
Fixed Runways



Model shown: SM14N001BL
with optional rolling jacks

Available in OPEN FRONT

14,000 lb. Capacity

- Adjustable lock ladders allow for expansion to alignment lift (components sold separately)
- Air-operated remote release locking latches and inline filter/regulator
- Patented dual locking system for added peace-of-mind.

12,000 - 14,000 lb. Drive-On General Service Lifts

Drive-On Four Post Lifts*	Y12N1000BL Y12N1000RD	Y12N1010BL Y12N1010RD	SM14N000BL SM14N000RD	SM14N001BL SM14N001RD	SM14N002BL SM14N002RD	SMO14N000BL SMO14N000RD	SMO14N001BL SMO14N001RD	SMO14N002BL SMO14N002RD
Open/Closed Front	Open Front & Rear		Closed Front			Open Front		
Rise	68-3/16"		73-3/4"					
Overall Length	21'-8"	22'-6"	18'-9"	20'-9"	22'-9"	19'-2"	22'-0"	23'-8"
Overall Width	7'-4"		11'-1"			11'-7"		
Drive-thru Width	N/A		117-1/2"					
Max Wheelbase	179-1/2"	189-1/2"	158-1/2"	182-1/2"	206-1/2"	158-1/2"	192"	212-1/2"
Motor/Voltage	2 HP, 208-230V, 1Ø							
Min Bay Size	13'x26'		15'x23'	15'x25'	15'x28'	15'x23'	15'x26'	15'x27'

*BL = Blue and RD = Red

Alignment Drive-On Lifts

YA12 - Wide Wheelbase Range
Flush Mounted or Recessed



Model shown: YA12NX

12,000 lb. Capacity

- 33% faster speed of rise
- Hydraulic cylinder, locking mechanism and position sensor *are protected inside and under the runways*

True Up / Down Movement
20% More Work Area and Better Lift Access!

INCLUDES
Rolling Jack



Model shown: RJ7000Z



20" Wide
Fixed Runways



Model shown: ARO14N001BL

Available in CLOSED FRONT

14,000 lb. Capacity

- Includes two 7000 lb. rolling jacks, stainless steel radius gauges, rear slip plates and inline filter/lubricator/regulator
- Alignment ready at multiple heights
- Patented dual locking system for added peace-of-mind.

10,000 - 18,000 lb. Two Post Symmetric Lifts

Two-Post Lifts*	SPO10N700BL SPO10N700RD Standard Arms Flip Up Adapters	• SPO10N5T0BL • SPO10N5T0RD Three-Stage Arms Truck Adapters (TA)	• SPO10NG50BL • SPO10NG50RD Three-Stage Arms Round Adapters (RA)	• SPO12N7T0BL • SPO12N7T0RD Three-Stage Arms Truck Adapters (TA)	SPO15N310BL SPO15N310RD Standard Arms Truck Adapters (TA)	SPO15LC310BL SPO15LC310RD Standard Arms Truck Adapters (TA)	SPO18N310BL SPO18N310RD Standard Arms Truck Adapters (TA)	SPO18LC310BL SPO18LC310RD Standard Arms Truck Adapters (TA)
*BL = Blue / RD = Red								
Capacity	10,000 lbs.	10,000 lbs.	10,000 lbs.	12,000 lbs.	15,000 lbs.		18,000 lbs.	
Rise	78-1/4"	80-1/4"	80-1/4"	80-1/4"	89-1/2"		89-1/2"	
Overall Height	11'-8-1/2"	11'-8-1/2"	11'-8-1/2"	13'-8"	15'-16'-6"		15'-16'-6"	
Overall Width	11'-5-1/2"	11'-5-1/2"	11'-5-1/2"	11'-5-5/8"	12'-11"		12'-11"	
Drive-thru Width	8'-6-1/2"	8'-6-1/2"	8'-6-1/2"	8'-6-3/8"	8'-9-3/4"		8'-9-3/4"	
Front Arm Min/Max	31" - 54"	27-1/2" - 59"	27-1/2" - 59"	27-1/2" - 59"	37-1/2" - 62"		37-1/2" - 62"	
Rear Arm Min/Max	31" - 54"	27-1/2" - 59"	27-1/2" - 59"	27-1/2" - 59"	37-1/2" - 62"		37-1/2" - 62"	
Min Adapter Height	4-3/4"	4-3/4"	3-5/8"	4-3/4"	5-3/4"		5-3/4"	
Motor/Voltage	2 HP, 208-230V	2 HP, 208-230V	2 HP, 208-230V	2 HP, 208-230V, 1Ø	2 HP, 208-230V, 1Ø		2 HP, 208-230V, 1Ø	
Min Bay Size	12'x24'	12'x24'	12'x24'	12'x26'	15'x30'		15'x30'	

Make sure your lifts are Gold Certified!

It takes a combination of the right design, engineering excellence and quality manufacturing to earn this certification. It is extra assurance for you that your lift meets the highest industry safety and performance standards. **Look for the Gold Label! Check out a complete listing of certified lifts at www.autolift.org.**



*BL = Blue and RD = Red

12,000 - 14,000 lb. Drive-On Alignment Racks

Alignment Racks*	YA12N01100BL YA12N01100RD	YA12N1110BL YA12N1110RD	ARO14N000BL ARO14N000RD	ARO14N001BL ARO14N001RD	ARO14N002BL ARO14N002RD	AR14N000BL AR14N000RD	AR14N001BL AR14N001RD	AR14N002BL AR14N002RD
Open/Closed Front	Open Front & Rear		Open Front			Closed Front		
Rise	68-3/16"		73-3/4"					
Overall Length	21'-8"	22'-6"	19'-2"	22'-0"	23'-8"	18'-9"	21'-7"	23'-3"
Overall Width	7'-4"		11'-7"			11'-1"		
Drive-thru Width	N/A		117-1/2"					
Max Wheelbase	179-1/2"	189-1/2"	158-1/2"	192-1/2"	212-1/2"	158-1/2"	192-1/2"	212-1/2"
Max 2WH/4WH Alignment	164-1/2" / 158"	174-1/2" / 158"	153" / 142"	188" / 158"	208" / 158"	153" / 142"	188" / 158"	208" / 158"
Motor/Voltage	2 HP, 208-230V, 1Ø							
Min Bay Size	13'x26'		15'x23'	15'x26'	15'x28'	15'x23'	15'x26'	15'x28'