



Quick connect hydraulic couplers, five each side, ten total.



Movable towers that ride on a track. Choose 2, 3 or 4 towers

Specifications

Length of bed: (top) 20 ft. (610 cm)

Length w/towers extended: 24 ft. 1 in. (734 cm)

Width of bed: 88 in. (224 cm)

Width w/towers extended: 11 ft. 4 in. (345 cm)

Width of treadway: 26.25 in. (67 cm)
Width between treadways: 35.5 in. (90 cm)

Overall height: 9 ft. 11 in. (302 cm) Twr hds lwrd: 9 ft. 1 in. (277 cm)

Loading height: 12 in. (30 cm)

Working height: 12 in. (30 cm) up to 42 in. (107 cm)

Hydraulics: 10 ton (9 metric ton), all elec. over hyd. or all air over hyd.

Power required for electric: 120v, 20 amp dedicated service.

Optional tower configurations: 2, 3 or 4 towers

Tie downs: 222

Lift capacity: 9,900 lbs. (4491 kg)

Specifications are subject to change without notice.

Specifications above are for 20 ft. (610 cm) 3 tower model




Combination Package 9020029

Ask about our other popular optional tools.



Working height, 12 in. (30 cm) up to 42 in. (107 cm) Lowers to a loading height of 12 in. (30 cm)

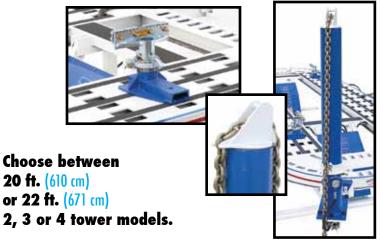

American Freedom 20' (610 cm)

9014202 - 2 tower

9014203 – 3 tower 9014204 – 4 tower **American Freedom**

22' (671 cm)

9014222 - 2 tower

9014223 - 3 tower

9014224 -- 4 tower

Call: 1-800-445-8244 Visit: AutoBodyShop.Com