

CL Challenger Lifts



Challenger Lifts' Portable Mid-Rise Lift is a great way to increase the productivity in a shop. It's like having a service bay anywhere, indoors or out.

The motor is conveniently mounted to a Heavy-Duty tow dolly, making it easy to move and operate on almost any solid surface.

Exclusive features include a sliding/rotating arm design with rubber pads, low drive-over clearance, and much more.



Model#: MR6
Portable Mid-Rise Lift
6,000 lb. capacity

MR6




Model#: SRM10
10,000 lb. capacity
Short-Rise Lift

SRM10

The SRM10 is a great choice for brake and tire servicing needs. Dual hydraulic cylinders provide a 10,000 lb. lifting capacity picking up vehicles ranging from small passenger cars to light trucks.

Standard 2 position spotting blocks and auxiliary adapters reach a wide range of vehicle pick up points. Lug nuts and other small parts are always within reach with the SRM10's inset storage trays. Its small footprint compared to other lift models make the SRM10 a perfect fit.

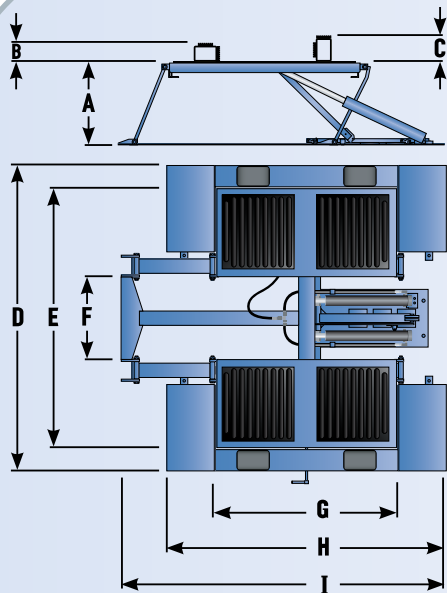

SRM10	Specifications
Lifting Capacity	10,000 lb. (4536kg)
A Raised Height	22" (559mm)
Lowered Height	4 1/4" (108mm)
Locking Bar Heights	13 13/16", 18 3/8", 21 1/4" (351mm, 467mm, 540mm)
B Low Adapter Position	4 3/4" (121mm)
C High Adapter Position	6 3/4" (171mm)
D Overall Width	85" (2159mm)
E Outside Width of Platforms	72" (1829mm)
F Width between Platforms	23" (584mm)
G Platform Overall Length	50" (1270mm)
H Ramp & Platform Overall Length	77 3/4" (1975mm)
I Overall Length	90 1/2" (2299mm)
Rearward Movement	13 1/4" (337mm)
Motor	1HP, Single Phase, 60Hz
Voltage	115v

standard accessories:



4 two position adapter blocks included
Part#: SR10-001

optional accessory:




Four 4 1/8" spotting block auxiliary adapters
Part#: 63100



Four 1 1/2" spotting block auxiliary adapters
Part#: 63101WM

Locking Positions:

- 49 3/4"
- 45 5/8"
- 41 1/4"
- 36"
- 30"
- 22 7/8"

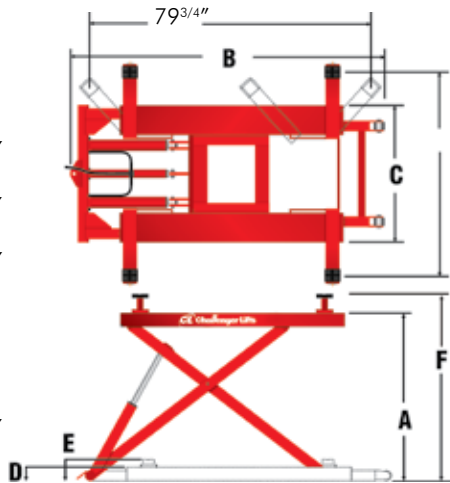

standard accessories:



4 high adapters included



4 low adapters included

Model Number	MR6
Lifting Capacity	6,000 lb. (2722kg)
A Rise Height!	52 13/16" (1341mm)
B Length Overall	94" (2388mm)
C Width Overall	39 1/2" (1003mm)
D Min. Collapsed Table Height	5 1/2" (140mm)
E Pad Height (Min.)	8 5/8" (219mm)
F Pad Height (Max)	60" (1524mm)
Hydraulic Hose	144' (3658mm)
Safety Lock Positions	6
Electric Motor	1 HP
Voltage	115v
Speed of Rise	45 sec.
Min. Recommended Bay Size	120" x 264" (3048mm x 6706mm)

Standard lift colors are Red (as shown) and Blue.

For more information, contact your Authorized Challenger Lifts Distributor:



The Automotive Lift Institute (ALI) certifies that the SRM10 described herein complies with the applicable provisions of the American National Standards ANSI/ALI ALCTV 2006 and is Third Party Validated by the ETL Testing Laboratory.

CHALLENGER LIFTS, INC.
200 Cabel Street
Louisville, Kentucky 40206

Phone Toll-Free: 800-648-5438
502-625-0700
Fax: 502-625-0711
E-mail: sales@challengerslifts.com

Challenger Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.