


FULL RISE SCISSOR SMART LIFT

AMGO Full Rise Scissor Lift is the perfect choice for raising vehicles high enough to walk underneath but have limited bay space width.

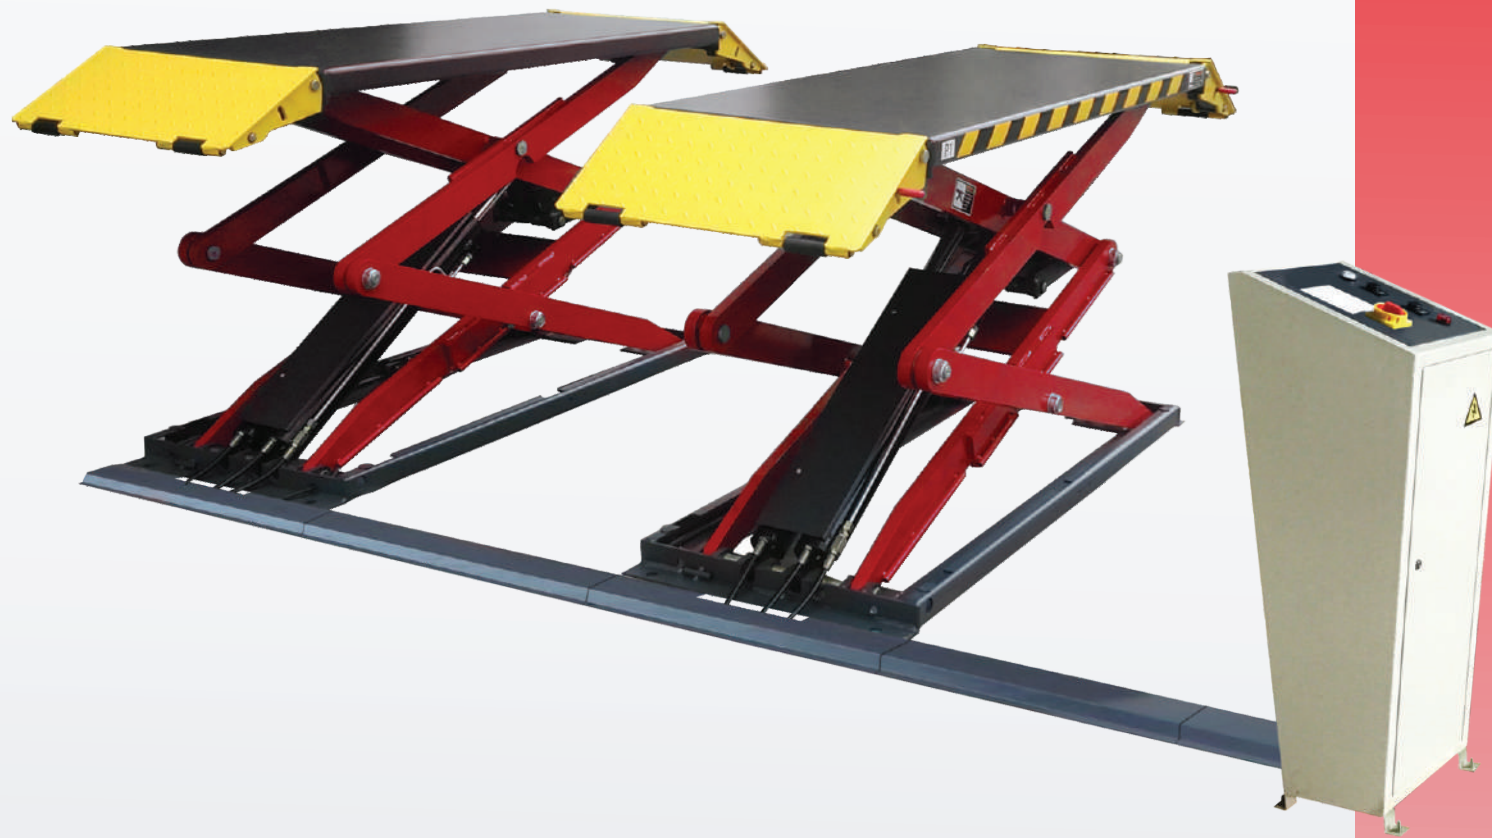


XL-7

ON SURFACE SCISSOR LIFT

MAIN FEATURES

- ✓ 24V control system for safety operation;
- ✓ 2-Dual synchronous cylinders are applied to assure the level lifting. on both platforms;
- ✓ Hydraulic cylinders built with hose burst valves for safety protecting.
- ✓ Both mechanical and hydraulic lock systems. It might be the safest small scissor lift in the world.
- ✓ Safety stop device at the height of 11 7/8"(300mm), both control buttons are needed to lower the lift from 11 7/8"(300mm) to ground with alarm tone for safety;

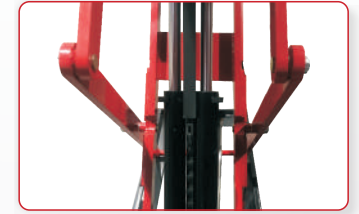


Both mechanical and hydraulic locks.




Adjustable ramps and quick extend platforms for longer vehicles.



Both 1 1/2" and 3" height rubber pads included as standard supply.

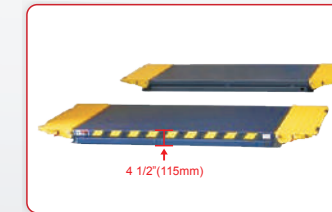


Low profile design, the closed height is only 4 1/2"(115mm).

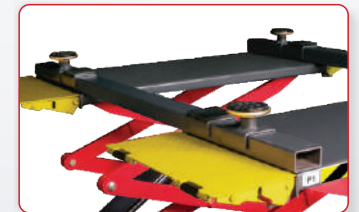

Optional Support Bars&Kits. Recommended for heavier vehicles with narrow frames.

SPECIFICATIONS

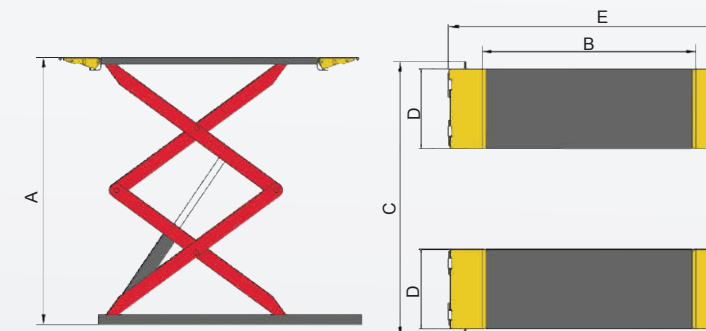

Model	XL-7	
Lifting Capacity	7,000lbs (3175kg)	
Lifting Time	41 S	
Lifting Height	A1	78 3/4" (2000mm)
Minimum Height	A2	4 1/2" (115mm)
Runway Length	B	63 1/4" (1608mm)
Overall Width	C	80" (2030mm)
Runway Width	D	23 5/8" (600mm)
Overall Length(Inc Ramps)	E	79 7/8" (2025mm)
Motor	2.0HP	
Gross Weight	1927 lbs (874kg)	

AMGO HYDRAULIC CORPORATION

1931 Jo Rogers Jr Blvd, Manning, SC 29102, USA
Tel: (803) 505-6410 www.amgohyd.com